



- Manufactured from 100% Polypropylene Cord
- High dirt holding capacity
- Reduces sand, silt, rust and scale particles

HYDRONIX SWC SERIES STRING WOUND CARTRIDGES

A cost effective solution for the reduction of sand, silt, rust, dirt and scale particles. Made from 100% Polypropylene cord, SWC Series String Wound Cartridges can withstand temperatures of up to 165°F (73.9°C).

HYDRONIX SWC SERIES STRING WOUND CARTRIDGES

Are suitable for a variety of applications including residential and commercial applications using both municipal and well water. Different wound patterns for different micron ratings ensure that you are getting the right product for the right application.



SWC SERIES

String Wound Cartridges

Materials of Construction

Filter Media: Polypropylene Fiber Cord
 Core: Polypropylene
 Temperature Range: 40°F to 165°F (4.4°C to 73.9°C)


| 2.5" DIAMETER SPECIFICATIONS | | |
|------------------------------|-------------|---------------|
| Part Number | Description | Micron Rating |
| SWC-25-1001 | 2.5" x 10" | 1 |
| SWC-25-1005 | 2.5" x 10" | 5 |
| SWC-25-1010 | 2.5" x 10" | 10 |
| SWC-25-1020 | 2.5" x 10" | 20 |
| SWC-25-1030 | 2.5" x 10" | 30 |
| SWC-25-1050 | 2.5" x 10" | 50 |
| SWC-25-10100 | 2.5" x 10" | 100 |
| SWC-25-2001 | 2.5" x 20" | 1 |
| SWC-25-2005 | 2.5" x 20" | 5 |
| SWC-25-2010 | 2.5" x 20" | 10 |
| SWC-25-2020 | 2.5" x 20" | 20 |
| SWC-25-2030 | 2.5" x 20" | 30 |
| SWC-25-2050 | 2.5" x 20" | 50 |
| SWC-25-20100 | 2.5" x 20" | 100 |
| SWC-25-3001 | 2.5" x 30" | 1 |
| SWC-25-3005 | 2.5" x 30" | 5 |
| SWC-25-3010 | 2.5" x 30" | 10 |
| SWC-25-3020 | 2.5" x 30" | 20 |
| SWC-25-3030 | 2.5" x 30" | 30 |
| SWC-25-3050 | 2.5" x 30" | 50 |
| SWC-25-30100 | 2.5" x 30" | 100 |
| SWC-25-4001 | 2.5" x 40" | 1 |
| SWC-25-4005 | 2.5" x 40" | 5 |
| SWC-25-4010 | 2.5" x 40" | 10 |
| SWC-25-4020 | 2.5" x 40" | 20 |
| SWC-25-4030 | 2.5" x 40" | 30 |
| SWC-25-4050 | 2.5" x 40" | 50 |
| SWC-25-40100 | 2.5" x 40" | 100 |

| 4.5" DIAMETER SPECIFICATIONS | | |
|------------------------------|-------------|---------------|
| Part Number | Description | Micron Rating |
| SWC-45-1001 | 4.5" x 10" | 1 |
| SWC-45-1005 | 4.5" x 10" | 5 |
| SWC-45-1010 | 4.5" x 10" | 10 |
| SWC-45-1020 | 4.5" x 10" | 20 |
| SWC-45-1030 | 4.5" x 10" | 30 |
| SWC-45-1050 | 4.5" x 10" | 50 |
| SWC-45-10100 | 4.5" x 10" | 100 |
| SWC-45-2001 | 4.5" x 20" | 1 |
| SWC-45-2005 | 4.5" x 20" | 5 |
| SWC-45-2010 | 4.5" x 20" | 10 |
| SWC-45-2020 | 4.5" x 20" | 20 |
| SWC-45-2030 | 4.5" x 20" | 30 |
| SWC-45-2050 | 4.5" x 20" | 50 |
| SWC-45-20100 | 4.5" x 20" | 100 |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

* Special lengths and diameters available.

HYDRONIX WATER TECHNOLOGY
 P.O. Box 927, Chino Hills, CA 91709 USA
 sales@hydronixwater.com • www.HydronixWater.com

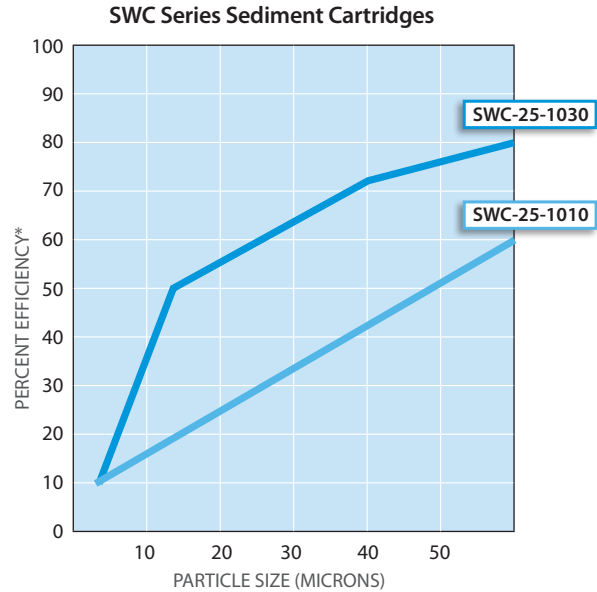

Distributed by:

